

SPD9611B


1-Line, Bi-directional, Thyristor Surge Suppressors

<http://www.sh-willsemi.com>

Descriptions

The SPD9611B is a bi-directional TSS (Thyristor Surge Suppressors) which can provide ESD protection for IC. It is specifically designed to protect telecom equipments from damaging overvoltage transients.

The SPD9611B is used to enable equipments to meet various regulatory requirements including, ITU-T K.20, K.21 and IEC 61000-4-5

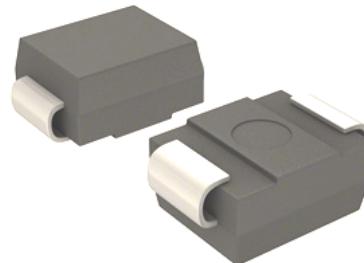


SMB (DO-214AA)


The SPD9611B is available in SMB package. Standard products are Pb-free and Halogen-free.

Features

- Peak off-state voltage: ±220V Max
- Excellent capability of absorbing transient surge
- Quick response to surge voltage
- Eliminate voltage overshoot caused by fast-rising transients
- Low leakage current:
- Solid-state silicon technology, non degenerative

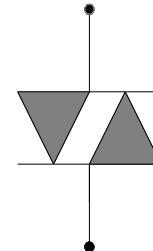

Schematic Diagram

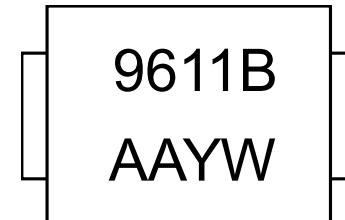

AA = Device code
 Y = Year code
 W = Week code

Marking (Top View)

Applications

- Audio/Video line
- Network and telecom
- Data lines and security systems
- Serial ports
- BNC interface
- DVR

Order information


Device	Package	Shipping
SPD9611B-2/TR	SMB	3000/Tape&Reel

Electrical characteristics ($T_A=25^\circ\text{C}$, unless otherwise noted)

Part Number	V_{DRM}	I_{DRM}	V_s	V_{BR}^1	I_s	I_h	V_t	I_t	C_o^2
	V	μA	V	V	mA	mA	V	A	pF
		Max.	Max.	Min.		Max.	Max.		Typ.
SPD9611B	220	1	300	230	800	150	4	2.2	50

Notes:

- 1) V_{BR} is measured at $I_{\text{BR}}=1\text{mA}$.
- 2) Off-state capacitance is measured at $f = 1\text{MHz}$, $V_{DC} = 2\text{V}$.

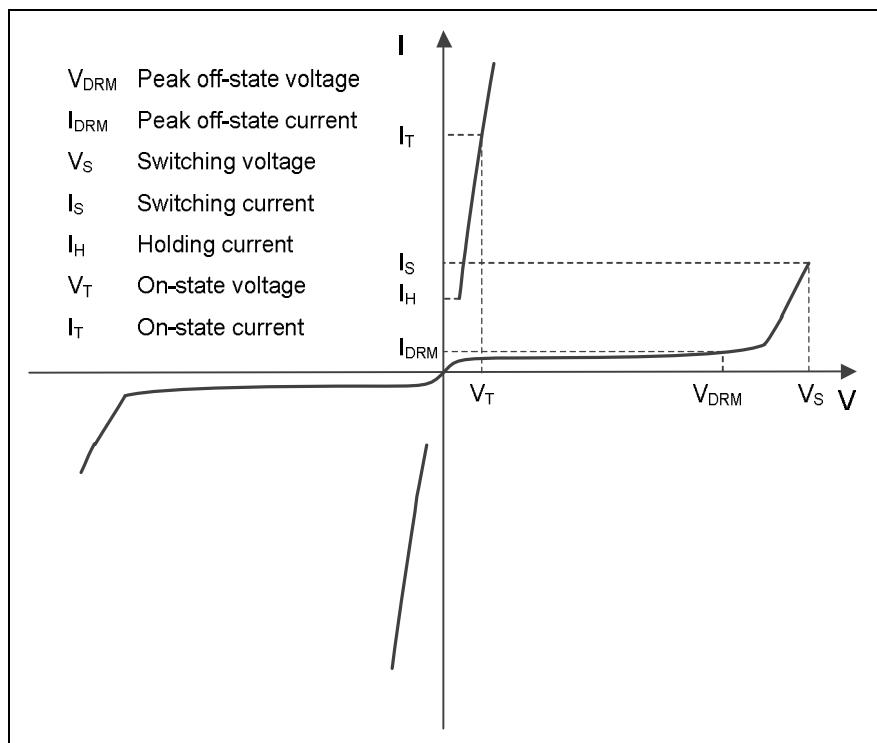

Definitions of electrical characteristics


Surge Ratings

Part Number	Surge Level (IEC61000-4-5)	
	Voltage waveform:10/700 μs	
	Current waveform:5/320 μs	
SPD9611B		V
SPD9611B		4000


Thermal considerations

Parameter	Symbol	Rating	Unit
Operation junction temperature	T_J	-40~150	°C
Storage temperature	T_{STG}	-55~150	°C
Lead temperature	T_L	260	°C
Junction to ambient thermal resistance	$R_{\theta JA}$	90	°C/W


Typical characteristics ($T_A=25^\circ\text{C}$, unless otherwise noted)

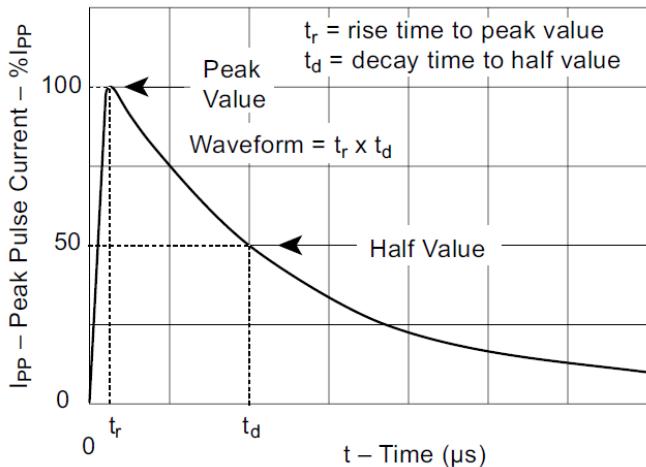


Peak pulse current waveform

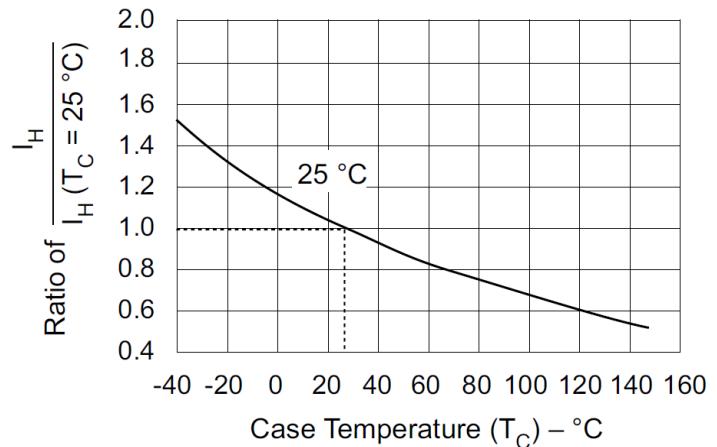

Normalized holding current vs. Case temperature

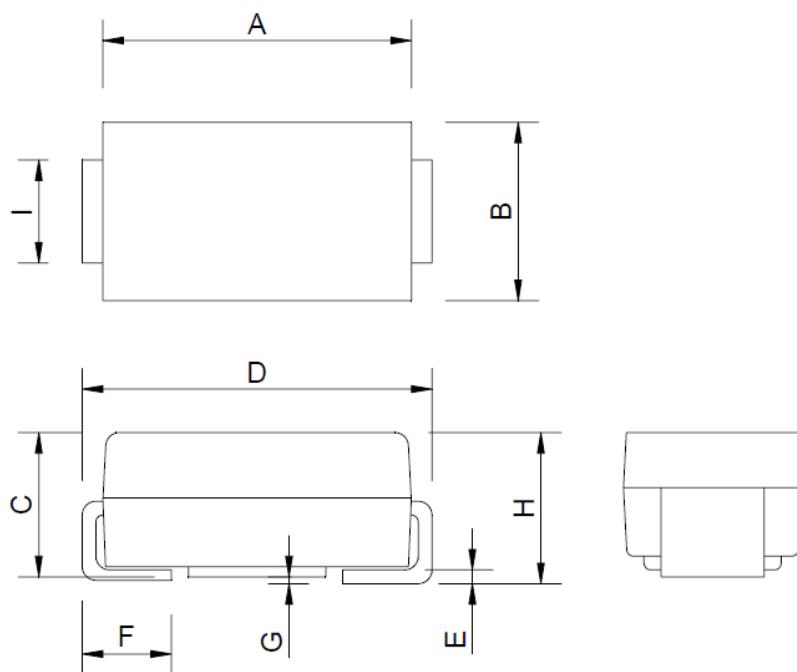Package outline dimensions
SMB


Symbol	Dimensions in millimeter		
	Min.	Typ.	Max.
A	4.30	4.50	4.70
B	3.30	3.50	3.70
C	2.00	2.15	2.30
D	5.05	5.30	5.55
E	0.10	0.20	0.30
F	0.95	1.25	1.55
G	0.20 Max.		
H	2.10	2.30	2.50
I	1.85	2.00	2.15

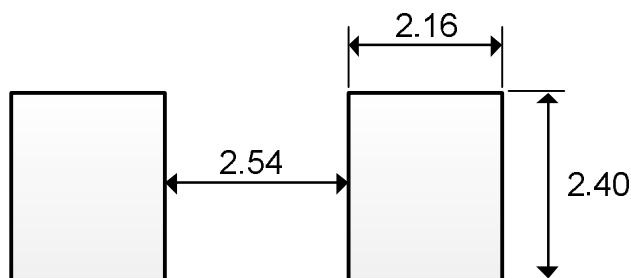Recommend land pattern (Unit: mm)

Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.